

30 MAR 2005

(42) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(49) World Intellectual Property

Organization

International Bureau



(43) International Publication Date
15 April 2004 (15.04.2004)

PCT

(10) International Publication Number
WO 2004/032522 A1


- (51) International Patent Classification⁷: H04N 9/31
- (21) International Application Number: PCT/IB2003/004118
- (22) International Filing Date: 17 September 2003 (17.09.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 02079129.9 4 October 2002 (04.10.2002) EP
- (71) Applicant (for all designated States except US): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): DE VAAN, Adrianus, J., S., M. [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (74) Agent: VAN DEN HOOVEN, Jan; Philips Intellectual Property & Standards, Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,

[Continued on next page]

(54) Title: COMPENSATION OF LIGHT SOURCE INTENSITY PULSE IN SCROLLING COLOUR TYPE PROJECTION SYSTEM

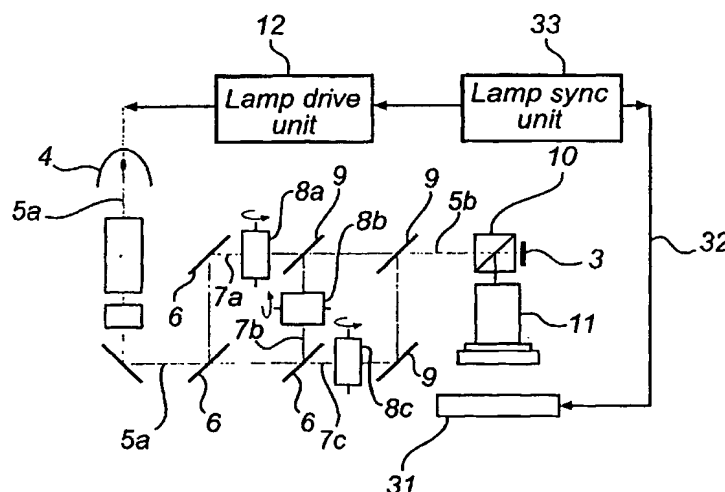

(57) Abstract: A scrolling colour projection system comprising a lamp (4) with a pulsed drive current (20) and a colour scanner (6, 8a, 8b, 8c, 9) for generating a light beam (5b) with a plurality of scrolling colour fields, which is arranged to illuminate a display device (3) to produce a projection of an image generated by the display device. The system further includes a filtering element (31) arranged in the light path between the lamp and the projected image, and the transmission of the filtering element (31) is synchronized with the lamp current so as to cancel an intensity peak in the lamp flux. The filtering element thus effectively removes the impact of the current pulse on the light intensity, resulting in a constant intensity in the projected image, and avoiding any interference patterns.

BEST AVAILABLE COPY

WO 2004/032522 A1

MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

COMPENSATION OF LIGHT SOURCE INTENSITY PULSE IN SCROLLING COLOUR TYPE
PROJECTION SYSTEM

The present invention relates to a scrolling colour projection system comprising a pulsed lamp and a colour scanner for generating a light beam with a plurality of scrolling colour fields, arranged to illuminate a display device to produce a projection of an image generated by the display device.

5

Such projection systems are particular in that light from a light source is divided into a plurality of beams, which are sequentially scrolled over a display device, e.g. a reflective LCD, and then projected by means of a lens. Normally, the three beams (R, G, B) are arranged to form three horizontal bars with a total height which is large enough to cover the reflective display. The bars are scrolled, e.g. from top to bottom, and are synchronized with the display so that they complete a scrolling sequence within one picture frame.

In such projector systems, it is advantageous to use a light source, e.g. a UHP (ultra high performance) lamp from Philips, having a superposed current pulse to stabilize the arc position. In a scrolling colour type of projection system, such a current pulse may interfere with the colour scanner and result in visible interference patterns in the projected image. In principle, the pulse acts as a stroboscope, highlighting a momentary image of the scanner, and may make interference patterns in the form of colour bars or the intermediate fields (spokes) visible on the screen. If the pulse frequency is a sub-frequency of the frame rate, the interference pattern will be fixed, and if the lamp frequency is out of phase with the frame rate, the bars will roll across the screen.

It is an object of the present invention to provide a scrolling colour projector system having a reduced image interference.

This object is achieved with a projector according to the invention as specified in claim 1.

The filtering element thus effectively removes the impact of the current pulse on the light intensity, resulting in a constant intensity in the projected image. Therefore, the mentioned interference patterns do not occur.

The filtering element can be located anywhere along the light path, for example behind the projection lens, or in front of the colour scanner. A filtering element located near the lamp must have a good resistivity in order to withstand the higher light intensity. A filtering element located close to the display must be free from distortion (e.g. particles on the surface) as such distortions may be visible in the projected image. Another factor is the size of the filtering element, which varies along the light path.

According to one embodiment, the filtering element is a liquid crystal (LC) cell. The transmission of the cell is then controlled so as to be synchronized with the lamp current and adjusted in accordance with the size of the peak in light intensity, so as to accomplish the constant intensity. In order to secure a long life-time, the LC cell is preferably placed behind the projection lens, where the light intensity is lower.

According to another embodiment, the filtering element is a rotating disc having a field with reduced transmission. The frequency of said wheel is synchronized with the lamp current, so that the field crosses the light path when the peak in intensity occurs. By adapting the transmission of the field in accordance with the size of the peak, a constant light intensity can be obtained.

These and other aspects of the invention are apparent from the preferred embodiments more clearly described with reference to the appended drawings.

Fig. 1 is a schematic view of a scrolling colour projection system according to the prior art.

Fig. 2 shows a scanner output of the projection system in Fig. 1.

Fig. 3 is a diagram of a current waveform for a UHP lamp with pulsed arc stabilisation.

Fig. 4 is a diagram of a lamp flux output corresponding to the current in Fig. 3.

Fig. 5 is a schematic view of a scrolling colour projection system according to a first embodiment of the invention.

Fig. 6 is a schematic view of a scrolling colour projection system according to a second embodiment of the invention.

Fig. 7 shows the rotating density filter of the embodiment in Fig. 6.

A projection system with scrolling colour scanning according to the prior art, also referred to as Scrolling Colour Sequential (SCS) system, is illustrated in Fig. 1. The system comprises a display driver 1, arranged to receive a data input stream 2, from e.g. a personal computer or a video cassette recorder (not shown), and to drive a display device 3, such as a reflective LCD. A light source 4, preferably a UHP lamp followed by an integrator, is controlled by a lamp driver 12 to generate a light beam 5a, which passes through a colour scanner (6, 8a, 8b, 8c, 9). The colour scanner converts the light beam 5a from the lamp 4 into a beam 5b having a plurality of differently coloured fields, typically three colour bars (R, G, B), continuously scrolling from top to bottom (see Fig. 2).

In the example illustrated in Fig. 1, a first set of mirrors 6 divides the beam 5a into three beams 7a, 7b, 7c. These beams are guided through three scanning prisms 8a, 8b, 8c (red, green and blue), and a second set of mirrors 9 recombines the beams to one beam 5b, as described above. The mirrors 6, 9 and the prisms 8a, 8b, 8c together form the colour scanner.

The beam 5b with scrolling colour bars 23 is directed onto the display device 3, and an image generated by the display device 3 is reflected back into a polarizing beam splitter (PBS) 10. The PBS 10 directs the reflected image to a projection lens 11, for projection on a suitable screen (not shown).

The scanning performed by the colour scanner 8a, 8b, 8c is synchronized with the frame rate of the video data 2, so that the colour bars 23 of the beam 5b complete a scrolling sequence (return to original position) in one frame period T_F . This is illustrated in Fig. 2.

The diagram in Fig. 3 shows a typical current waveform 20 with period T_L in the UHP lamp 4, including a pulse 21 to stabilize the arc position. The diagram in Fig. 4 shows the corresponding lamp flux 22 from the projection lamp 4, which is essentially the rectified waveform 20 in Fig. 3. As is clear from Fig. 4, the lamp flux 22 comprises a DC flux with a superimposed AC light flux, resulting from the stabilizing pulse 21. As a consequence of the rectification, the period T_{AC} of the AC component is only half of T_L , i.e. the pulse frequency is twice the lamp frequency.

As mentioned above, the AC light flux resulting from the stabilization pulse acts as a fictitious light source, and causes a stroboscopic effect on the colour scanner 8a, 8b, 8c. When the frequency of this AC component of the light flux (referred to as the pulse frequency) is a sub-harmonic of the display frame rate frequency, the colour bars 23 can be

'captured' by the stroboscopic effect, resulting in visible colour bars in the projected image.

When lamp frequency and frame rate frequency are locked, the visible bars are fixed in one position. If they are not locked (i.e. a-synchronic), the visible bars will be scrolling over the screen because lamp and scanner are a-synchronic. The phase between lamp frequency and frame rate frequency determines the position of the colour bars on the screen.

A first embodiment is illustrated in Fig. 5. A filtering element in the form of a liquid crystal (LC) cell 31 is arranged in the light path between the lamp and the projection of the image, in this case behind the projection lens 11. The LC cell is controlled by a drive voltage 32, which is synchronized with the lamp current 20 by means of a synchronization unit 33. In other words, the synchronization unit 33 is connected to the lamp driver 12 and to the LC cell 31.

The synchronization unit 33 is adapted to control the LC cell in such a way that the variable transmission, which is a function of the voltage 32, is decreased when a stabilization pulse 21 occurs in the lamp current 20, and a peak occurs in the lamp flux 22. The decrease in transmission is adapted to compensate for the increase in intensity present during the peak, and, as a result, the peak is cancelled and not visible in the projected image. This leads to a constant intensity in the projected image, and interference patterns are avoided.

A second embodiment is illustrated in Figs. 6 and 7. In this case, the filtering element is a rotating disc 41, made of a transparent material and having a neutral density grey filter 42 patterned onto its surface. Here, the disc 41 precedes the colour scanner mirrors 6, but another location may also be found to be advantageous. As is shown in Fig. 7, the filter field 42 may be a sector of the disc 41, but may also comprise two or more sectors and/or have a different shape.

A synchronization unit 43 is connected to the lamp driver 12 and to a disc controller 44. The synchronization unit 43 is adapted to control the disc controller 44 to rotate the disc 42 with a phase and frequency such that the shaded filter field 42 passes the light path when a peak occurs in the lamp flux 22. Furthermore, the transmission of the shaded field 43 is adapted to compensate the increase in light intensity present during the peak, and, as a result, the peak is cancelled and not visible in the projected image.

It is clear that the detailed description above is related to two specific embodiments of the invention, and that these embodiments do not limit the scope of the appended claims. More specifically, the scrolling projection system can be modified by the skilled person without departing from the inventive concept. For example, the colour scanner

may be of a different type than the one schematically illustrated in the drawings. Also, other filtering elements may be envisaged, and placed at other locations along the light path.

CLAIMS:

1. A scrolling colour projection system comprising
a lamp (4) with a pulsed drive current (20), and
a colour scanner (6, 8a, 8b, 8c, 9) for generating a light beam (5b) with a
plurality of scrolling colour fields,
5 said light beam being arranged to illuminate a display device (3) to produce a
projection of an image generated by the display device,
characterized in that a filtering element (31; 41) is arranged in the light path
between the lamp and the projected image, the transmission of said filtering element (31; 41)
being synchronized with the lamp current so as to cancel an intensity peak in the lamp flux.
10
2. A scrolling colour projection system as claimed in claim 1, further comprising
a synchronization unit (33; 43) for synchronizing said filtering element (31; 41) with the
lamp (4).
- 15 3. A scrolling colour projection system as claimed in claim 1, comprising a
projecting lens (11) for projecting said image, wherein said filtering element is arranged
behind said projecting lens (11).
4. A scrolling colour projection system as claimed in claim 1 or 2, wherein said
20 filtering element precedes said colour scanner (6, 8a, 8b, 8c, 9).
5. A scrolling colour projection system as claimed in claims 1 to 3, wherein said
filtering element is a liquid crystal (LC) cell (31).
- 25 6. A scrolling colour projection system as claimed in claims 1 to 3, wherein said
filtering element is a rotating disc (41) having a field (42) with reduced transmission.
7. A scrolling colour projection system as claimed in claim 6, said disc (41)
being transparent except for at least one sector-shaped field (42).

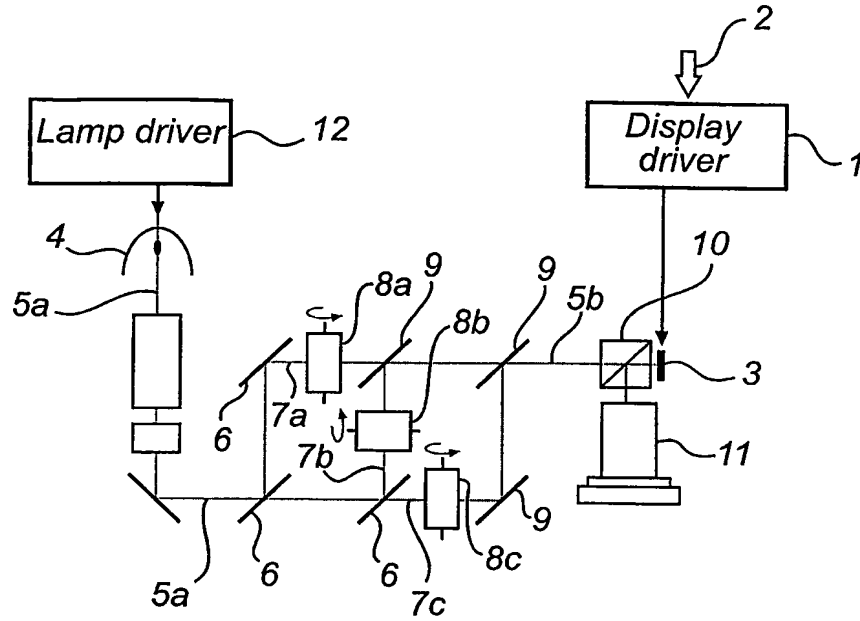


FIG. 1

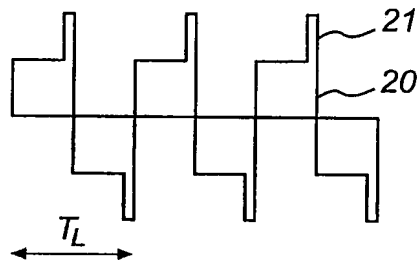


FIG. 3

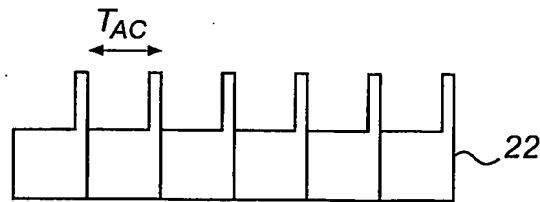


FIG. 4

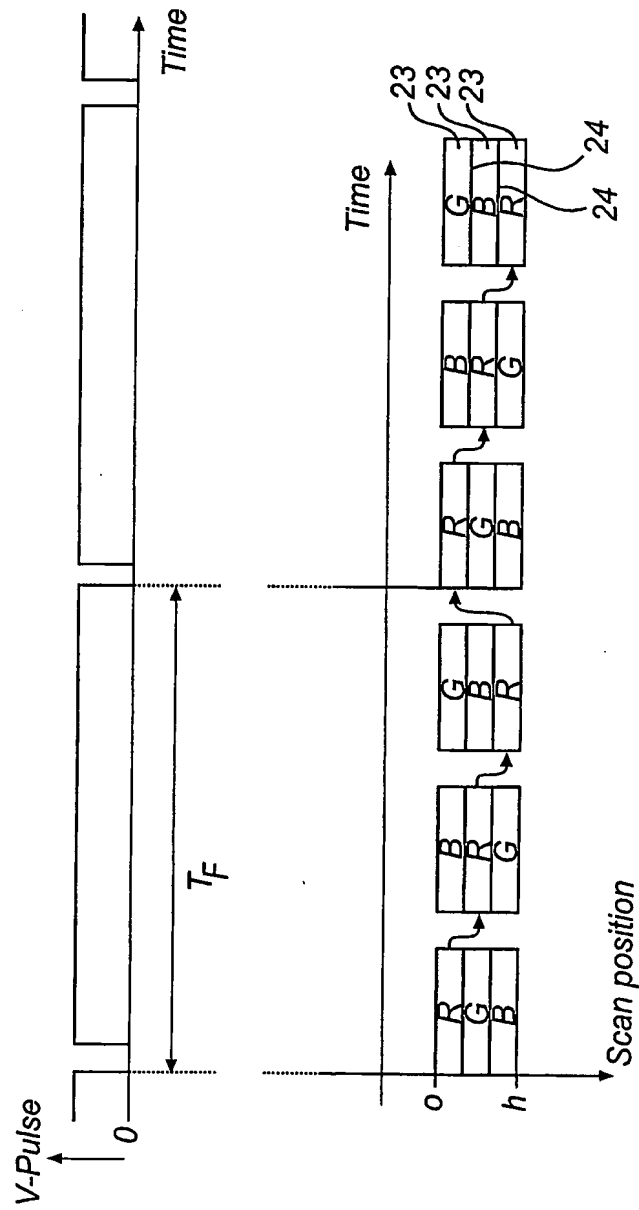


FIG.2

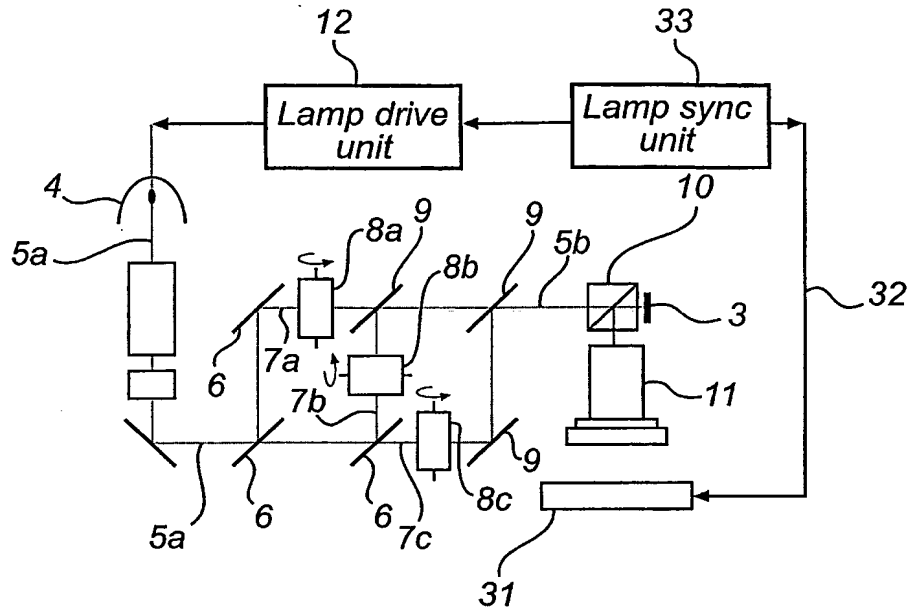


FIG.5

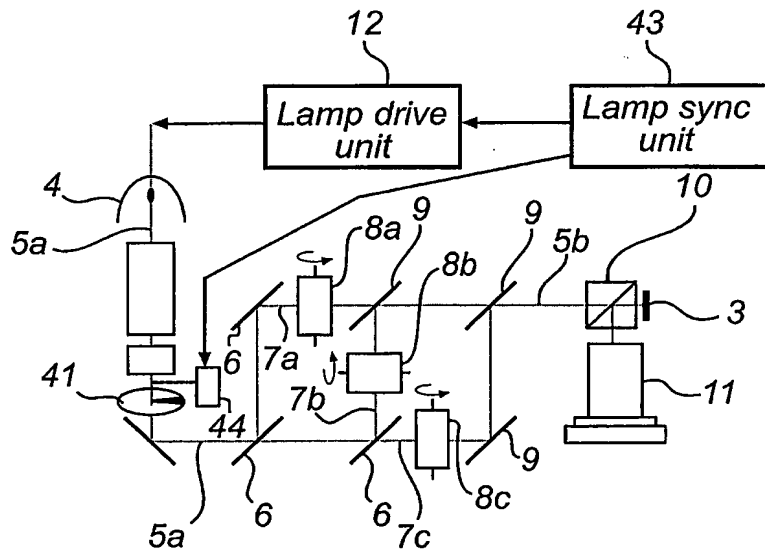


FIG.6

4/4

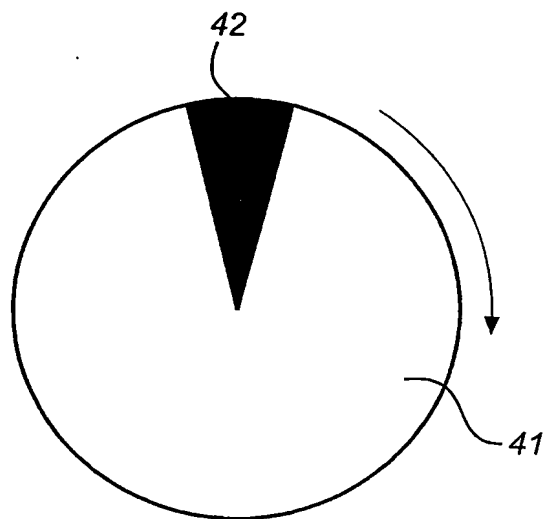


FIG.7

INTERNATIONAL SEARCH REPORT

Internal Application No.
PCT/IB-03/04118

CLASSIFICATION OF SUBJECT MATTER
H04N9/31

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, A	WO 03 067897 A (VAN DEN WILDENBERG HENRICUS W ; LUERKENS PETER (NL); DE VAAN ADRIAN) 14 August 2003 (2003-08-14) the whole document	1-5
A	US 6 400 511 B2 (SMITS WILLEM HENDRIK ET AL) 4 June 2002 (2002-06-04) the whole document	1-4, 6, 7
A	US 4 443 696 A (TABOADA JOHN) 17 April 1984 (1984-04-17) abstract; figure 1	
A	US 5 532 763 A (OTTO DETLEV ET AL) 2 July 1996 (1996-07-02) the whole document	

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the International filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the International filing date but later than the priority date claimed

- *T* later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the International search

17 December 2003

Date of mailing of the International search report

14/01/2004

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Aratari, R

INTERNATIONAL SEARCH REPORT

Internat. Application No.

PCT/03/04118

WO 03067897	A	14-08-2003	WO 03067897 A1	14-08-2003
US 6400511	B2	20-09-2001	WO 0149041 A1	05-07-2001
			EP 1157563 A1	28-11-2001
			JP 2003518643 T	10-06-2003
			TW 519832 B	01-02-2003
			US 2001022692 A1	20-09-2001
US 4443696	A	17-04-1984	NONE	
US 5532763	A	02-07-1996	US 5608467 A	04-03-1997
			US 5410370 A	25-04-1995
			US 5548347 A	20-08-1996
			US 5528318 A	18-06-1996
			US 5508738 A	16-04-1996
			US 5416514 A	16-05-1995
			CN 1062819 A ,B	15-07-1992
			DE 69125125 D1	17-04-1997
			DE 69125125 T2	21-08-1997
			EP 0492721 A2	01-07-1992
			JP 3352100 B2	03-12-2002
			JP 4316296 A	06-11-1992
			KR 223724 B1	15-10-1999

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.